




MDUNR/L

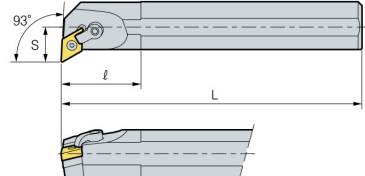

93°

Min. Bearbeitungsdurchm.



Ød



Abb. 1



Abb. 2



Abb. 3

WSP



DN__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Klemme	Klemmschraube	Rohrstift	Schlüssel	Zwischenlage
A32S-MDUNR/L-15-3	○	○	40	32	30	250	22	50	3	DN__1504__	CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SD43D
S32S-MDUNR/L-15-3	○	○	40	32	30	250	22	50	3		CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SD43D
S32U-MDUNR/L-15		○	40	32	30	350	22	50	3	DN__1506__	CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SS43D
S32U-MDUNR/L-15-3	○		40	32	30	350	22	50	3	DN__1504__	CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SS43D
S40T-MDUNR/L-15-3	○	○	50	40	38	300	27	60	3		CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SD43D
S40V-MDUNR/L-15		○	50	40	38	400	27	60	3	DN__1506__	CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SS43D
S40V-MDUNR/L-15-3	○	○	50	40	38	400	27	60	3	DN__1504__	CDH6N	DHA1/4-21	SP4D	HW23.8L HW31.8L	SS43D