




SSKPR/L



75°

Min. Bearbeitungsdurchm.

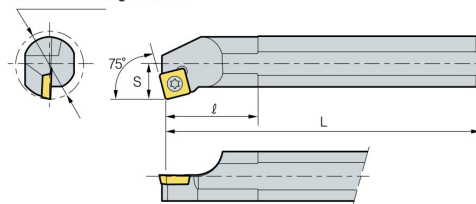

WSP



SP__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Schlüssel	Schraube
A12K-SSKPR/L-09	○	○	16	12	11,5	125	9	20	1	SP__0903__	TW09P	FTNA0307
A16M-SSKPR/L-09	○	○	20	16	15	150	11	25	1		TW09P	FTNA0307
A20Q-SSKPR/L-09	○	○	25	20	19	180	13	32	1		TW09P	FTNA0307
S12M-SSKPR/L-09	●	▲	16	12	11	150	9	20	2		TW09P	FTNA0307
S16N-SSKPR/L-09	●	○	20	16	14	160	11	25	2		TW09P	FTNA0307
S16R-SSKPR/L-09	○	●	20	16	14	200	11	25	2		TW09P	FTNA0307
S20N-SSKPR/L-09	●	○	25	20	18	160	13	32	2		TW09P	FTNA0307
S20S-SSKPR/L-09	○	●	25	20	18	250	13	32	2		TW09P	FTNA0307