




SVUBR/L

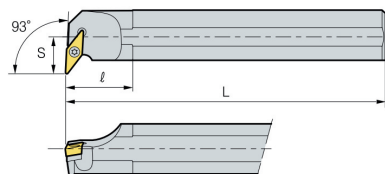

93°

Min. Bearbeitungsdurchm.



Ød



Abb. 1



Abb. 2



Abb. 3

WSP



VB_

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Lagenschraube	Schlüssel	Schraube	Zwischenlage
A25T-SVUBR/L-11	○	○	32	25	23	300	17	40	1	VB_1102_	-	TW07P	FTKA02565	-
A32S-SVUBR/L-16	▲	▲	40	32	30	250	22	50	1	VB_1604_	SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S25T-SVUBR/L-16		▲	32	25	23	300	17	40	3		SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S32S-SVUBR/L-16	▲	▲	40	32	30	250	22	50	3		SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S32U-SVUBR/L-16	○	▲	40	32	30	350	22	50	3		SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S40T-SVUBR/L-16	▲	▲	50	40	38	300	27	60	3		SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S40V-SVUBR/L-16	○	○	50	40	38	400	27	60	3		SHXN0509F	TW15P HW35L	FTGA03512	SV32S