




STFCR/L



90°

Min. Bearbeitungsdurchm.

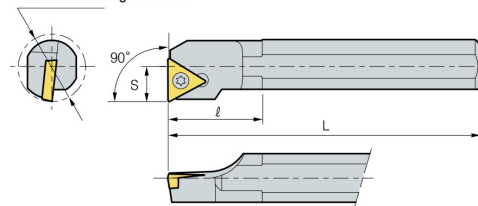

WSP



TC__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Lagenschraube	Schlüssel	Schraube	Zwischenlage
A10H-STFCR/L-09	○	▲	13	10	9,5	100	7	16	1	TC__0902__	-	TW06P	FTKA02206	-
A12K-STFCR/L-09	○	▲	16	12	11,5	125	9	20	1		-	TW06P	FTKA02206	-
A12K-STFCR/L-11	▲	▲	16	12	11,5	125	9	20	1	TC__1102__	-	TW07P	FTKA02565	-
A16M-STFCR/L-11	▲	▲	20	16	15	150	11	25	1		-	TW07P	FTKA02565	-
A16R-STFCR/L-16		▲	20	16	15	200	11	25	1	TC__16T3__	-	TW15P	FTGA03510	-
A20Q-STFCR/L-11	○	▲	25	20	19	180	13	32	1	TC__1102__	-	TW07P	FTKA02565	-
A20R-STFCR/L-16		▲	25	20	19	200	13	32	1	TC__16T3__	-	TW07P	FTKA02565	-
A25R-STFCR/L-16	▲	▲	32	25	24	200	17	40	1		-	TW15P	FTGA03510	-
A32S-STFCR/L-16	▲	▲	40	32	30	250	22	50	3		SHXN0509F	TW15P HW35L	FTGA03512	ST32S
A40T-STFCR/L-16		○	50	40	37	300	27	60	3		SHXN0509F	TW15P HW35L	FTGA03512	ST32S
S10M-STFCR/L-09	▲	▲	13	10	9	150	7	16	2	TC__0902__	-	TW06P	FTKA02206	-
S12M-STFCR/L-09	▲	▲	16	12	11	150	9	20	2		-	TW06P	FTKA02206	-
S12M-STFCR/L-11	▲	▲	16	12	11	150	9	20	2	TC__1102__	-	TW07P	FTKA02565	-
S16R-STFCR/L-11	▲	▲	20	16	14	200	11	25	2		-	TW07P	FTKA02565	-
S20S-STFCR/L-11	●	▲	25	20	18	250	13	32	2		-	TW07P	FTKA02565	-
S20S-STFCR/L-16	▲	▲	25	20	18	250	13	32	2	TC__16T3__	-	TW15P	FTGA03510	-
S25R-STFCR/L-16	▲	▲	32	25	23	200	17	40	3		-	TW15P	FTGA03510	-
S25T-STFCR/L-16	▲	▲	32	25	23	300	17	40	3		-	TW15P	FTGA03510	-
S32S-STFCR/L-16	○	▲	40	32	30	250	22	50	3		SHXN0509F	TW15P HW35L	FTGA03512	ST32S
S32U-STFCR/L-16	▲	▲	40	32	30	350	22	50	3		SHXN0509F	TW15P HW35L	FTGA03512	ST32S
S40T-STFCR/L-16	○	▲	50	40	38	300	27	60	3		SHXN0509F	TW15P	FTGA03512	ST32S
S40V-STFCR/L-16		▲	50	40	38	400	27	60	3		SHXN0509F	TW15P HW35L	FTGA03512	ST32S