




SVUCR/L



93°

Min. Bearbeitungsdurchm.

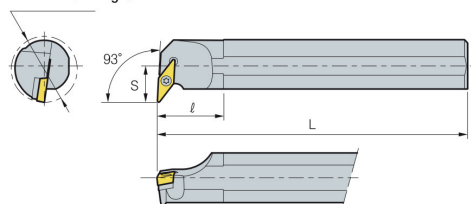

WSP



VC_

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Lagenschraube	Schlüssel	Schraube	Zwischenlage
A40T-SVUCR/L-16	▲	▲	50	40	38	300	27	60	1	VC_1604_	SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S16R-SVUCR/L-11	▲	▲	22	16	14	200	13	25	2	VC_1103_	-	TW07P	FTKA02565	-
S20S-SVUCR/L-11	▲	▲	25	20	18	250	13	32	2	VC_1103_	-	TW07P	FTKA02565	-
S20S-SVUCR/L-13	▲	▲	25	20	18	250	13	32	2	VC_1303_	-	TW09P	FTKA0307	-
S25R-SVUCR/L-13	▲	▲	32	25	23	200	17	40	3	VC_1303_	-	TW09P	FTKA0307	-
S25R-SVUCR/L-16	▲	▲	32	25	23	200	17	40	3	VC_1604_	-	TW15P	FTGA03510	-
S25T-SVUCR/L-11	▲	▲	32	25	23	300	17	40	3	VC_1103_	-	TW07P	FTKA02565	-
S25T-SVUCR/L-16	▲	▲	32	25	23	300	17	40	3	VC_1604_	-	TW15P	FTGA03510	-
S32S-SVUCR/L-16	▲	▲	40	32	30	250	22	50	3	VC_1604_	SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S32U-SVUCR/L-16	▲	▲	40	32	30	350	22	50	3	VC_1604_	SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S40T-SVUCR/L-16	▲	▲	50	40	38	300	27	60	3	VC_1604_	SHXN0509F	TW15P HW35L	FTGA03512	SV32S
S40V-SVUCR/L-16	▲	○	50	40	38	400	27	60	3	VC_1604_	SHXN0509F	TW15P HW35L	FTGA03512	SV32S