



DSSNR/L



Rechtsausführung
45°

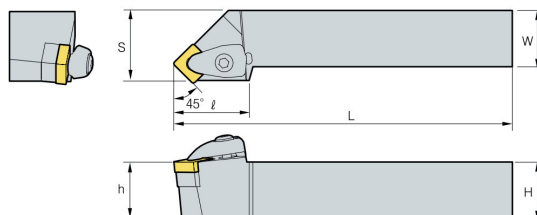

(mm)

Bezeichnung	L	R	H	W	L	S	h	ℓ	WSP	Feder	Klemme	Klemmschraube	Lagenschraube	Schlüssel	Zwischenlage
DSSNR/L															
2020-K09	○	▲	20	20	125	25	20	28,5	SN__0903__	SPR0510	CVH3	CHX0415	FTKA0307	HW25P	SS32V
2020-K12	▲	▲	20	20	125	25	20	35,0	SN__1204__	SPR0714	CVH4	CHX0518	FTKA0410	HW30P	SS44V
2525-M12	▲	▲	25	25	150	32	25	35,0		SPR0714	CVH4	CHX0518	FTKA0410	HW30P	SS44V
2525-M15	▲	▲	25	25	150	32	25	38,5	SN__1506__	SPR0811	CVH5	CHX0622	FTKA0511	HW40L	SS54V
3225-P12	○	●	32	25	170	32	32	35,0	SN__1204__	SPR0714	CVH4	CHX0518	FTKA0410	HW30P	SS44V
3232-P12	▲	▲	32	32	170	40	32	35,0		SPR0714	CVH4	CHX0518	FTKA0410	HW30P	SS44V
3232-P15	▲	▲	32	32	170	40	32	38,5	SN__1506__	SPR0811	CVH5	CHX0622	FTKA0511	HW40L	SS54V
3232-P19	▲	▲	32	32	170	40	32	46,0	SN__1906__	SPR0811	CVH6	CHX0622	FTNA0511	HW40L	SS64V
4040-S19	▲	▲	40	40	250	50	40	46,0		SPR0811	CVH6	CHX0622	FTNA0511	HW40L	SS64V