




SCLPR/L



95°

Min. Bearbeitungsdurchm.

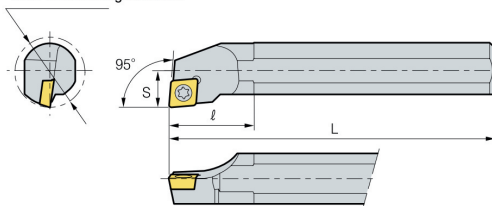

WSP



CP__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Schlüssel	Schraube
A10H-SCLPR/L-08	○	○	12	10	9,65	100	6	-	1	CP__0802__	TW09P	FTNA0305
A12K-SCLPR/L-08	○	▲	16	12	11,5	125	9	20	1		TW09P	FTNA0307
A16M-SCLPR/L-09	○	○	20	16	15,5	150	10	25	1	CP__0903__	TW15P	FTNA0408
A20Q-SCLPR/L-09	○	○	25	20	19	180	13	32	3		TW15P	FTNA0408
S10M-SCLPR/L-08	○	●	13	10	9	150	7	16	2	CP__0802__	TW09P	FTNA0305
S12M-SCLPR/L-08	○	●	16	12	11	150	9	20	2		TW09P	FTNA0307
S16N-SCLPR/L-09	○	●	20	16	14	160	11	25	2	CP__0903__	TW15P	FTNA0408
S16R-SCLPR/L-09	○	●	20	16	14	200	11	25	2		TW15P	FTNA0408
S20N-SCLPR/L-09	○	▲	25	20	18	160	13	32	2		TW15P	FTNA0408
S20S-SCLPR/L-09	○	▲	25	20	18	250	13	32	2		TW15P	FTNA0408