


SCLCR/L



95°

Min. Bearbeitungsdurchm.


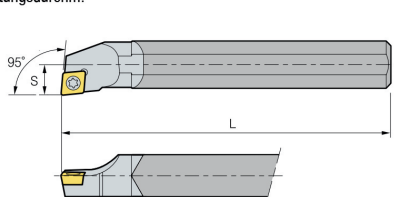


Abb. 1




Abb. 2




Abb. 3

WSP



CC__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	Abb.	WSP	Schlüssel	Schraube
C08K-SCLCR/L-06	▲	▲	10	8	7	125	5	2	CC_T0602__	TW07P	FTKA02555
E08K-SCLCR/L-06	▲	▲	10	8	7	125	5	2		TW07P	FTKA02555
C10K-SCLCR/L-06	▲	▲	12	10	9	125	6	2		TW07P	FTKA02565
C10M-SCLCR/L-06	▲	▲	12	10	9	150	6	2		TW07P	FTKA02565
E10K-SCLCR/L-06	▲	▲	12	10	9	125	6	2		TW07P	FTKA02565
E10M-SCLCR/L-06	▲	▲	12	10	9	150	6	2		TW07P	FTKA02565
C12M-SCLCR/L-06	▲	▲	14	12	11	150	9	2		TW07P	FTKA02565
C12Q-SCLCR/L-06	○	▲	14	12	11	180	9	2		TW07P	FTKA02565
E12M-SCLCR/L-06	▲	▲	14	12	11	150	9	2		TW07P	FTKA02565
E12Q-SCLCR/L-06	▲	▲	14	12	11	180	9	2		TW07P	FTKA02565
C12M-SCLCR/L-09	▲	▲	15	12	11	150	8	2	CC_T09T3__	TW15P	FTGA03508
C12Q-SCLCR/L-09	○	▲	15	12	11	180	8	2		TW15P	FTGA03508
E12M-SCLCR/L-09	▲	▲	15	12	11	150	8	2		TW15P	FTGA03508
E12Q-SCLCR/L-09	▲	▲	15	12	11	180	8	2		TW15P	FTGA03508
C16R-SCLCR/L-09	▲	▲	20	16	15	200	11	2		TW15P	FTGA03508
C16S-SCLCR/L-09	▲	▲	20	16	15	250	11	2		TW15P	FTGA03508
E16R-SCLCR/L-09	▲	▲	20	16	15	200	11	2		TW15P	FTGA03508
E16S-SCLCR/L-09	▲	▲	20	16	15	250	11	2		TW15P	FTGA03508
C20R-SCLCR/L-09	▲	▲	25	20	18	200	13	2		TW15P	FTGA03508
C20S-SCLCR/L-09	○	▲	25	20	18	250	13	2		TW15P	FTGA03508
E20R-SCLCR/L-09	▲	▲	25	20	18	200	13	2		TW15P	FTGA03508
E20S-SCLCR/L-09	▲	▲	25	20	18	250	13	2		TW15P	FTGA03508
C25T-SCLCR/L-12	○	●	32	25	23	300	17	2	CC_T1204__	TW15P	FTGA0411F
E25T-SCLCR/L-12	▲	▲	32	25	23	300	17	2		TW15P	FTGA0411F
C04G-SCLCR/L-03	▲	▲	5	4	3,8	90	2,5	1	CC_T0301__	TW06P	FTNA01633
C05H-SCLCR/L-03	▲	▲	6	5	4,4	100	3	1		TW06P	FTNA01633
C06H-SCLCR/L-04	▲	▲	7	6	5,4	100	3,5	1	CC_T0401__	TW06P	FTNA0238
E06H-SCLCR/L-04	▲	▲	7	6	5,4	100	3,5	1		TW06P	FTNA0238
C07K-SCLCR/L-04	▲	▲	8	7	6,4	125	4	1		TW06P	FTNA0238
E07K-SCLCR/L-04	○	▲	8	7	6,4	125	4	1		TW06P	FTNA0238