





SDUCR/L



93°

Min. Bearbeitungsdurchm.

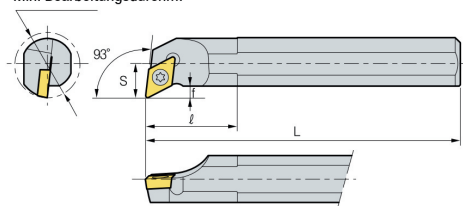

WSP



DC__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Lagenschraube	Schlüssel	Schraube	Zwischenlage
A10H-SDUCR/L-07	▲	▲	13	10	9,5	100	7	16	1	DC__0702__	-	TW07P	FTKA02555	-
A12K-SDUCR/L-07	▲	▲	16	12	11,5	125	9	20	1		-	TW07P	FTKA02565	-
A16M-SDUCR/L-07	▲	▲	20	16	15	150	11	25	1		-	TW07P	FTKA02565	-
A16R-SDUCR/L-07		▲	20	16	15	200	11	25	1		-	TW07P	FTKA02565	-
A20Q-SDUCR/L-11	▲	▲	25	20	19	180	13	32	1	DC__11T3__	-	TW15P	FTGA03508	-
A25R-SDUCR/L-11	▲	▲	32	25	24	200	17	40	1		-	TW15P	FTGA03510	-
A25T-SDUCR/L-11		▲	32	25	24	300	17	40	1		-	TW15P	FTGA03510	-
A32U-SDUCR/L-11	▲	▲	40	32	30	350	22	50	3		-	TW15P	FTGA03510	-
A40T-SDUCR/L-11	▲	▲	50	40	38	300	27	60	3		SHXN0509F	TW15P HW35L	FTGA03512	SD32S
A40V-SDUCR-11		○	50	40	38	400	27	60	3		SHXN0509F	TW15P HW35L	FTGA03512	SD32S
S10M-SDUCR/L-07	▲	▲	13	10	9	150	7	16	3	DC__0702__	-	TW07P	FTKA02555	-
S12M-SDUCR/L-07	▲	▲	16	12	11	150	9	20	3		-	TW07P	FTKA02565	-
S16Q-SDUCR/L-11	▲	▲	20	16	14	180	11	25	3	DC__11T3__	-	TW15P	FTGA03508	-
S16R-SDUCR/L-07	▲	▲	20	16	14	200	11	25	3	DC__0702__	-	TW07P	FTKA02565	-
S16R-SDUCR/L-11	▲	▲	20	16	14	200	11	25	3	DC__11T3__	-	TW15P	FTGA03508	-
S20R-SDUCR/L-11		▲	25	20	18	200	13	32	3		-	TW15P	FTGA03508	-
S20S-SDUCR/L-07		▲	25	20	18	250	13	32	3	DC__0702__	-	TW07P	FTKA02565	-
S20S-SDUCR/L-11	▲	▲	25	20	18	250	13	32	3	DC__11T3__	-	TW15P	FTGA03508	-
S25R-SDUCR/L-11	▲	▲	32	25	23	200	17	40	3		-	TW15P	FTGA03510	-
S25T-SDUCR/L-11	▲	▲	32	25	23	300	17	40	3		-	TW15P	FTGA03510	-
S32S-SDUCR/L-11	▲	▲	40	32	30	250	22	50	3		-	TW15P	FTGA03510	-
S32U-SDUCR/L-11	▲	▲	40	32	30	350	22	50	3		-	TW15P	FTGA03510	-
S40T-SDUCR/L-11	○		50	40	38	300	27	50	3		SHXN0509F	TW15P HW35L	FTGA03512	SD32S
S40V-SDUCR/L-11		▲	50	40	38	400	27	50	3		SHXN0509F	TW15P HW35L	FTGA03512	SD32S
S50W-SDUCR/L-11	○	▲	63	50	43	450	35	55	3		-	TW15P	FTGA03510	-