




PTFNR/L



Min. Bearbeitungsdurchm.

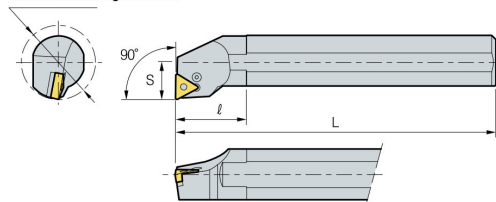

WSP



TN__

90°

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Kniehebel	Rohrstift	Rohrstift-Dorn	Schlüssel	Schraube	Zwischenlage
A25R-PTFNR/L-16	○	▲	32	25	24	200	17	40	1	TN_1604__	LV3	-	-	HW25L	VHX0617	-
A25R-PTFNR/L-16N	○	○	32	25	24	200	17	40	3		LV3N	-	-	HW25L	VHX0617N	-
A32S-PTFNR/L-16	○	▲	40	32	30	250	22	50	3		LV3	SP3	LSPS3	HW25L	VHX0617	ST317B
A32S-PTFNR/L-16N	○	○	40	32	30	250	22	50	3		LV3N	SP3N	LSPS3	HW25L	VHX0617N	ST317N
A40T-PTFNR/L-16	○	○	50	40	38	300	27	60	1		LV3	SP3	LSPS3	HW25L	VHX0617	ST317B
A40T-PTFNR/L-16N	○	○	50	40	38	300	27	60	1		LV3N	SP3N	LSPS3	HW25L	VHX0617N	ST317N
S16R-PTFNR/L-11	○	▲	20	16	14	200	11	25	2	TN_1103__	LV2	-	-	HW25L	VHX0509B	-
S20S-PTFNR/L-11	○	▲	25	20	18	250	13	32	2		LV2	-	-	HW25L	VHX0509B	-
S25R-PTFNR/L-11	○	●	32	25	23	200	17	40	3		LV2	-	-	HW25L	VHX0509B	-
S25R-PTFNR/L-16	▲	▲	32	25	23	200	17	40	3	TN_1604__	LV3B	-	-	HW20L	VHX0512B	-
S25R-PTFNR/L-16N	○	○	32	25	23	200	17	40	3		LV3BN	-	-	HW20L	VHX0512BN	-
S25T-PTFNR/L-11		○	32	25	23	300	17	40	3	TN_1103__	LV2	-	-	HW25L	VHX0509B	-
S25T-PTFNR/L-16	▲	▲	32	25	23	300	17	40	3	TN_1604__	LV3B	-	-	HW20L	VHX0512B	-
S25T-PTFNR/L-16N	○	●	32	25	23	300	17	40	3		LV3BN	-	-	HW20L	VHX0512BN	-
S32S-PTFNR/L-16	●	▲	40	32	30	250	22	50	3		LV3	SP3	LSPS3	HW25L	VHX0617	ST317B
S32S-PTFNR/L-16N	●	●	40	32	30	250	22	50	3		LV3N	SP3N	LSPS3	HW25L	VHX0617N	ST317N
S32U-PTFNR/L-16	○	▲	40	32	30	350	22	50	3		LV3	SP3	LSPS3	HW25L	VHX0617	ST317B
S40T-PTFNR/L-16	●	▲	50	40	38	300	27	60	3		LV3	SP3	LSPS3	HW25L	VHX0617	ST317B
S40T-PTFNR/L-16N	●	●	50	40	38	300	27	60	3		LV3N	SP3N	LSPS3	HW25L	VHX0617N	ST317N
S40V-PTFNR/L-16	○	▲	50	40	38	400	27	60	3		LV3	SP3	LSPS3	HW25L	VHX0617	ST317B