




SSKCR/L



75°

Min. Bearbeitungsdurchm.

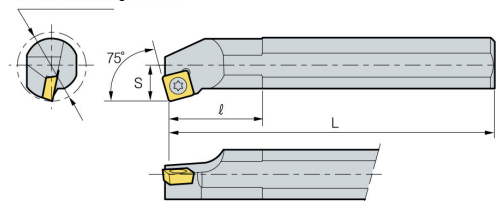

WSP



SC__

(mm)

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Lagenschraube	Schlüssel	Schraube	Zwischenlage
A12K-SSKCR/L-09	○	○	16	12	11,5	125	9	20	1	SC_09T3__	-	TW15P	FTGA03507	-
A16M-SSKCR/L-09	▲	▲	20	16	15	150	11	25	1		-	TW15P	FTGA03508	-
A20Q-SSKCR/L-09	▲	▲	25	20	19	180	13	32	1		-	TW15P	FTGA03508	-
A25R-SSKCR/L-12	○	○	32	25	24	200	17	40	1	SC_1204__	-	TW15P	FTGA0411F	-
A32S-SSKCR/L-12	○	○	40	32	30	250	22	50	3		SHXN0610F	TW15P HW40L	FTGA0411F	SS42S
S12M-SSKCR/L-09	▲	●	16	12	11	150	9	20	2	SC_09T3__	-	TW15P	FTGA03507	-
S16R-SSKCR/L-09	○	▲	20	16	14	200	11	25	2		-	TW15P	FTGA03508	-
S20S-SSKCR/L-09	○	▲	25	20	18	250	13	32	2		-	TW15P	FTGA03508	-
S25R-SSKCR/L-12	○	▲	32	25	23	200	17	40	3	SC_1204__	-	TW15P	FTGA0411F	-
S25T-SSKCR/L-12	○	○	32	25	23	300	17	40	3		-	TW15P	FTGA0411F	-
S32S-SSKCR/L-12	▲	●	40	32	30	250	22	50	3		SHXN0610F	TW15P HW40L	FTGA0411F	SS42S
S32U-SSKCR/L-12	○	○	40	32	30	350	22	50	3		SHXN0610F	TW15P HW40L	FTGA0411F	SS42S