




DTFNR/L



90°

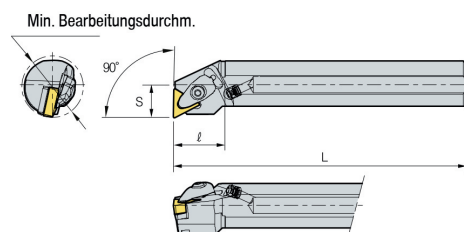

WSP



TN__

Bezeichnung	L	R	ØD	Ød	H	L	S	ℓ	Abb.	WSP	Düse	Feder	Klemme	Klemmschraube	Lagenschraube	Schlüssel	Zwischenlage
A25R-DTFNR/L-16	▲	▲	32	25	24	200	17	40	1	TN__1604__	CN0605	SPR0510	CVH3	CHX0415	FTKA0307	HW25P	ST32V
A32S-DTFNR/L-16	○	▲	40	32	30	250	22	50	3		CN0605	SPR0510	CVH3	CHX0415	FTKA0307	HW25P	ST32V
A40T-DTFNR/L-22	▲	▲	50	40	38	300	27	60	3	TN__2204__	CN0605	SPR0714	CVH4	CHX0518	FTKA0410	HW30P	ST44V
A50U-DTFNR/L-22	▲	▲	63	50	47	350	35	70	3		CN0605	SPR0714	CVH4	CHX0518	FTKA0410	HW30P	ST44V
S32S-DTFNR/L-16	▲	○	40	32	30	250	22	50	3	TN__1604__	CN0605	SPR0510	CVH3	CHX0415	FTKA0307	HW25P	ST32V
S32U-DTFNR/L-16	▲	▲	40	32	30	350	22	50	3		CN0605	SPR0510	CVH3	CHX0415	FTKA0307	HW25P	ST32V

(mm)